



LED FA8 T8 SINGLE-PIN LIGHT

ZS-T8-36P8FT-FA8-F(5000K)

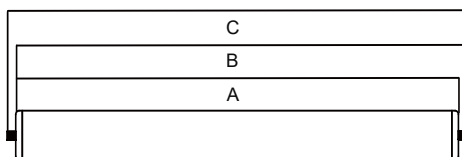

Max Length	8ft
A	93.1in/2367mm
B	93.4in/2374mm
C	93.7in/2382mm
Weight (kg)	<0.68+/-0.01

Wiring diagram: Direct wire (Two-end power):

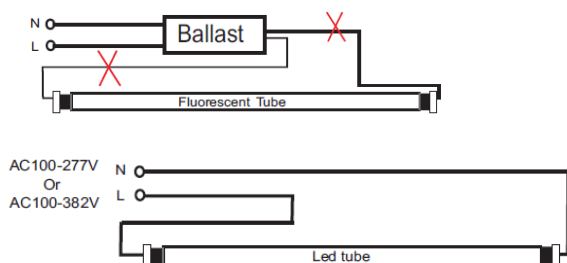

PRODUCT DESCRIPTION:

The E2 FA8 T8 LED Single-Pin Light is a line-driven energy saving linear replacement for 8ft Single-Pin T8 and T12 lamps up to 100W. It operates off of 120V-277V power and is ideal for even light distribution in a commercial space. The lamp is constructed of aluminum and polycarbonate. Superior optics with small endcaps and a 120° beam spread maximize illumination. UL, FCC classified/recognized, UL listed and RoHs compliant.

FEATURES:

- Integral high-performance, insulated LED driver and high-performance SMD LEDs
- Smooth light output, instant-on, no hot spot and glare-free
- High uniformity of light creates elegant lighting atmosphere for retail & commercial applications
- Clear or frosted lens available
- 50,000 Hours L70 Lifespan
- ETL and DLC Listed

APPLICATION:

- Linear Replacement Lamp
- Retail and Commercial Applications including Supermarket, Production Facility, Warehouse, etc.

TESTED DATA:

- Light Output: 4838lm
- Wattage: 36 W
- Efficacy: 130 lm/W
- Power Factor: 0.95
- CCT: 4000, and 5000 K
- CRI: 84
- THD: 23 %
- Frequency: 50-60Hz
- Input Voltage: AC120-277V
- IP Rating: IP20
- Working Environment: -4°F-113°F
- Beam Angle: 120°
- Dimming Compatible: No
- Mercury Content: No Hg
- Lens: Polycarbonate
- Net Weight: 1.50 lbs

WARRANTY:

E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at www.e2lightingusa.com.

Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	Working Hours	CRI
ZS-T8-36P8FT-FA8-F(5000K)	36W	5000K	UL & DLC	No	AC120-277V	4838 lm	50,000hrs	84