
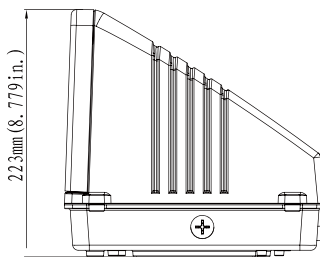
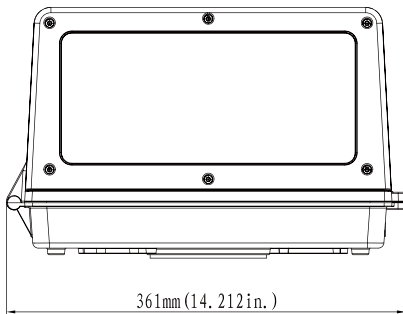


LED MEDIUM WALL PACK LIGHT

WPFYYWZZVXXKYY Series

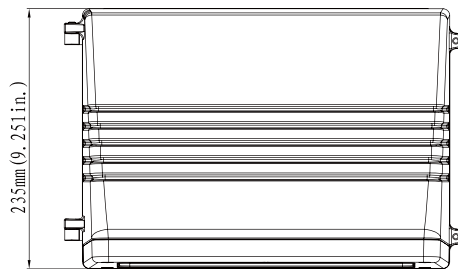

PRODUCT DESCRIPTION:

The E2 Medium Wall Pack features a traditional appearance powered by advanced LED optics that deliver exceptional lumen output and energy savings for parking garages, building entrances, public areas, schools, hospitals, hotels and outdoor walkways. Engineered for maximum durability in harsh outdoor settings, the wall pack is capable of replacing 100- and 175-watt metal halide luminaires. Durable dark bronze, black or white finish. UL, cUL classified/recognized, UL and cUL listed, DLC listed and RoHS compliant.

FEATURES:

- Full Cutoff and Compliant to Dark Sky Requirement
- Type III Polycarbonate Optical Lens with UV Stabilizers
- 50,000 Hours L70 Lifespan
- UL, cUL and DLC® Standard 4

APPLICATION:

- Outdoor Full-Cutoff Wall-Mounted Area Luminaires
- Parking Garages, Building Entrances, Public Areas, Schools, Hospitals, Hotels and Outdoor Walkways

TESTED DATA:

- Technical Requirements Version: 4
- Classification: Standard
- Light Output: 4900, 5000, 7350, 7500 lm
- Wattage: 45, 50, 70, 75 W
- Efficacy: 109, 100, 109, 100 lm/W
- Power Factor: 0.90
- CCT: 4000, 5000 K
- CRI: 82
- THD: <20 %
- Frequency: 50-60Hz
- Input Voltage: AC120-277V, 347V
- IP Rating: Damp and Wet Location
- Working Environment: -4°F-104°F
- Beam Angle: Type III
- Dimming Compatible: No
- Mercury Content: No Hg
- Lens: Glass
- Net Weight: 12.12 lbs for 45,50W and 14.3 lbs for 70,75W

WARRANTY:

E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at www.e2lightingusa.com.

Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	Working Hours	CRI
WPF45W12V50KDP0	45W	4000K/5000K	UL, cUL & DLC® Standard	No	AC120-277V	4900lm	50,000hrs	82
WPF50W34V50KDP0	50W	4000K/5000K	UL, cUL & DLC® Standard	No	AC3477V	5000lm	50,000hrs	82
WPF70W12V50KDP0	70W	4000K/5000K	UL, cUL & DLC® Standard	No	AC120-277V	7350lm	50,000hrs	82
WPF75W34V50KDP0	75W	4000K/5000K	UL, cUL & DLC® Standard	No	AC3477V	7500lm	50,000hrs	82

MODEL SELECTION Typical order example: WPF45W12V50KDP1					
Family	Wattage (Nominal)	Input Voltage	CCT	Finish	Sensor (Option)
WPF= Medium Wall Pack	45W= 45W replaces up to 100W MH	12V= 102V	40K= 4000K	D= Dark Bronze	P0= 120-277V Photocell
	50W= 50W replaces up to 100W MH	27V= 120-277V	50K= 5000K	B= Black	P1= 120V Photocell
	70W= 70W replaces up to 175W MH	34V= 347V		W= White	Blank= No Photocell
	75W= 75W replaces up to 175W MH				

- 277V driver operates on 120-277V (50/60 Hz), Please specify 120V option only when ordering with photocell.
- 45W and 70W are limited to 120-277V input only; 50W and 75W are limited to 347V input only.
- 347V Photocell is only suitable for 50W and 75W.