



## LED FLAT Tunable PANEL LIGHT

### E2-PLC-50W-2x4ft (35-40-45-50W) (3K,35K,4K,5K)

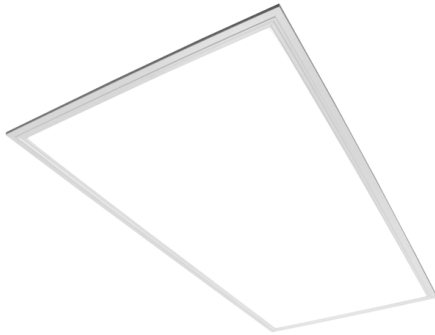

2x4

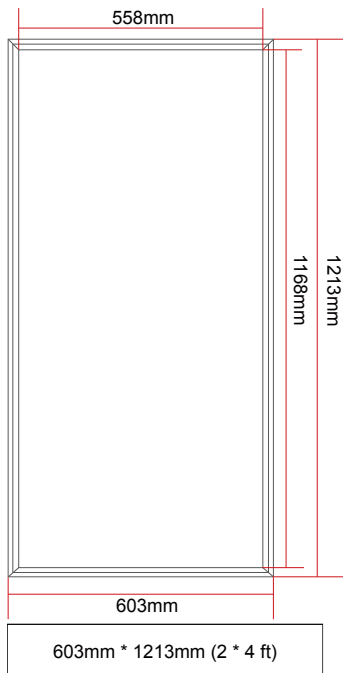

Switch to Tune the Wattage and CCT:



CCT Tunable

Watt Tunable



### PRODUCT DESCRIPTION:

Typically used to replace 2'x4' fluorescent fixtures, E2 Lighting's LED flat panel lights are designed to lay in drop ceilings in offices, schools and healthcare applications. The flat panels are available in dimming and non-dimming options and are compatible with building controls, motion sensors, timers and daylight harvesting systems. The unique design of the panels produces side-emitting illumination with high transmittance LGP to achieve even, consistent shadowless light. UL classified/recognized, UL listed, DLC Premium listed and RoHs compliant.

### FEATURES:

- Leading LED driver design and overlong lifespan
- Simple, chic and elegant appearance and non-discoloring
- Greater than 80% energy savings compared to traditional grid fixtures
- Instant startup, perfect light uniformity, soft light, no glare, no noise, no strobe
- 50,000 Hours L70 Lifespan
- Wattage tunable: 35W-40W-45W-50W
- CCT tunable: 3000K-3500K-4000K-5000K
- UL and DLC® Standard 4.3 ( Pending)

### APPLICATION:

- 2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
- Widely used in Office Buildings, Plants, Schools, Supermarkets, Hotels, Meeting Rooms, Exhibition Halls, Underground Garages and all other environments in need of High Energy Savings and High CRI

### TESTED DATA:

- Technical requirements Version: 4.2
- Classification: Standard
- Light Output: 3850 lm, 4400 lm, 4900 lm, 5500 lm
- Wattage: 35W, 40W, 45W, 50W
- Efficacy: 110 lm/W
- Power Factor: 0.92
- CCT: 3000K, 3500K, 4000K, 5000 K
- CRI: 82
- THD: <15%
- Frequency: 50-60Hz
- Input Voltage: AC100-277V
- IP Rating: IP40
- Working Environment: -4°F-122°F
- Beam Angle: 120°
- Dimming Compatible: 0-10V dimming
- Mercury Content: No Hg
- Material: Aluminum + High quality LGP
- Lens: Polycarbonate
- Net Weight: 13.89 lbs

### WARRANTY:

E2 warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. Please see our complete warranty terms located at [www.e2lightingusa.com](http://www.e2lightingusa.com).


Product Number	Wattage	Color	Certifications	Dimmable	Voltage	Lumens	Working Hours	CRI
E2-PLC-50W-2X4ft	35W 40W 45W 50W	0000K 3500K 4000K 5000K	UL & DLC® Standard	Yes  0-10V Dimming	AC100-277V	3850 lm 4400 lm 4900 lm 5500 lm	50,000hrs	82

1. 3000K, 3500K, 4000K, 5000K CCT Tunable.


Standard: Drop Ceiling



Option: Suspension Mount

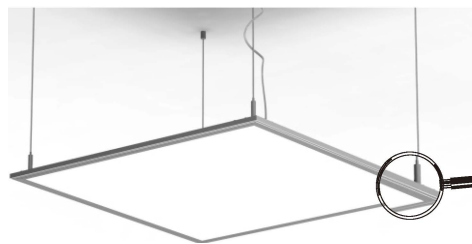

Option: Surface Mount

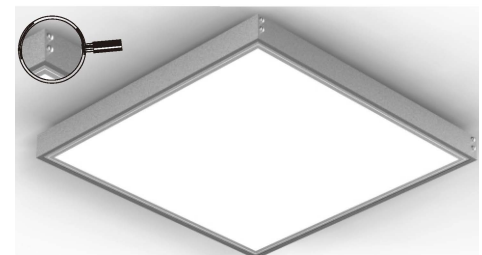

### Wiring of panel light with 0-10V dimmable driver

